

## IKOfix MEMBRANE PRESSURE PLATE (CS)


### PRODUCT INFORMATION

Made of Aluzinc and are ideal for use on compressible substrates such as insulated warm roof build ups  
Used in conjunction with the IKOfix fasteners for securing Armourplan SM/P or Spectraplan SM membranes in a layout as indicated by the project specific IKO Polymeric wind uplift calculation

### FEATURES & BENEFITS

- Cold Application
- Excellent mechanical properties
- Quick and easy installation
- Cost effective application

Material	Carbon Steel
Length	80mm
Width	40mm
Thickness.	1mm
Hole Diameter	6.5mm
Product Number	37110500

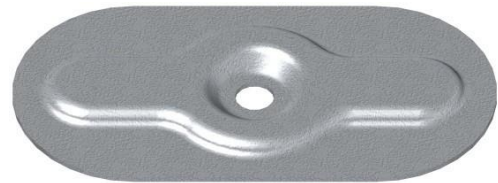

### INSTALLATION



1. Position the pressure plate and insert the fixing.
2. Using a drill fitted with the correct drive bar and stop bit screw the fastener into the substrate until the fixing depth is reached.

### DESIGN PERFORMANCE INFORMATION

Membrane Pressure Plate (CS)		IKOfix Universal Fixing (0.7mm Steel Deck)	IKOfix Universal Fixing (Timber Deck)	IKOfix Concrete Fixing	IKOfix Cold Roof Fixing (Timber)
Characteristic Resistance	N	1310	1330	3510	1340

### STORAGE

IKOfix Fasteners should be kept dry. They should be stored in their original cartons raised off the surface of the roof and covered with a suitable waterproof layer.

### FURTHER PRODUCT INFORMATION

Full product literature, health & safety and technical sheets are available as downloads from our website [www.ikopolymeric.com](http://www.ikopolymeric.com) or on request by email [polymeric.marketing@iko.com](mailto:polymeric.marketing@iko.com).