

Thermally Broken Membrane Washer

Product Details

Material	Polypropylene
Tube Length	15mm – 425mm
Colour	Black/Grey
Product Number	37050xxx




Introduction

- Made of high grade polypropylene with an integral 45mm dia. head
- Available in a variety of lengths to accommodate the ever increasing insulation thicknesses required to meet Part L/J requirements whilst eliminating cold bridge effects
- Used in conjunction with the IKOfix Universal or Concrete fasteners for securing Armourplan SM/P or Spectraplan SM membranes in a layout as indicated by the project specific IKO Polymeric wind uplift calculation

Features & Benefits

- Cold Application
- Excellent mechanical properties
- Quick and easy installation
- Cost effective application

Installation

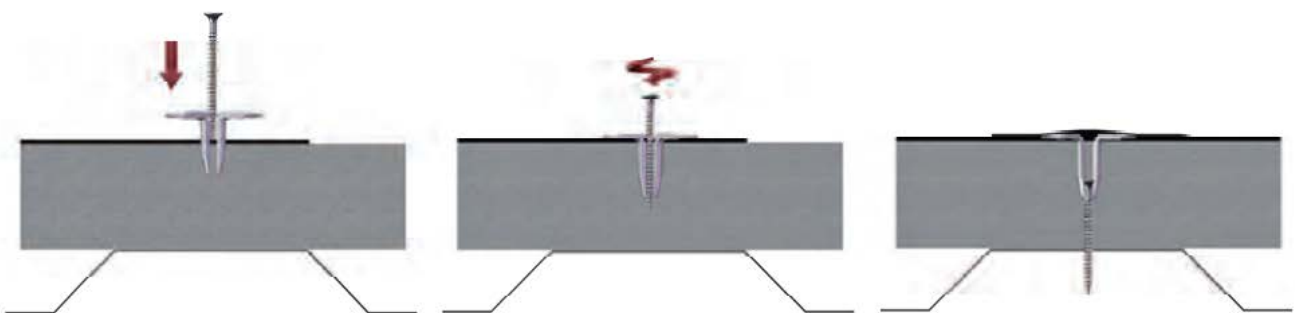

1. Lightly insert the Membrane Tube and suitable IKOfix fastener through the membrane into the insulation board.
2. Using a drill fitted with the correct drive bar and stop bit screw the fastener into the substrate until the fixing depth is reached.

Typical Properties

Product Code	Plastic Sleeve			Insulation Thickness	
	Diameter	Length	Plate	Min.	Max.
	mm	mm	mm	mm	mm
15mm Membrane Tube	15.5	15	50	30	280
35mm Membrane Tube	15.5	35	50	50	300
65mm Membrane Tube	15.5	65	50	80	330
85mm Membrane Tube	15.5	85	50	100	350
105mm Membrane Tube	15.5	105	50	120	370
135mm Membrane Tube	15.5	135	50	150	400
165mm Membrane Tube	15.5	165	50	180	430
185mm Membrane Tube	15.5	185	50	200	450
225mm Membrane Tube	15.5	225	50	240	490
255mm Membrane Tube	15.5	255	50	270	520
285mm Membrane Tube	15.5	285	50	300	550
325mm Membrane Tube	15.5	325	50	340	590
385mm Membrane Tube	15.5	385	50	400	650
425mm Membrane Tube	15.5	425	50	440	690

Design Performance Information

Membrane Tube		IKOfix Universal Fixing (0.7mm Steel Deck)	IKOfix Universal Fixing (Timber Deck)	IKOfix Concrete Fixing
Characteristic Resistance	N	1080	1330	1510

Storage

IKOfix Fasteners should be kept dry. They should be stored in their original cartons raised off the surface of the roof and covered with a suitable waterproof layer.

Further Product Information

Full product literature, health & safety and technical sheets are available as downloads from our website www.ikopolymeric.com or on request by email polymeric.marketing@iko.com.



Whilst every care is taken to see that the information given in this literature is correct and up to date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded. Intending purchasers of our materials should therefore verify with the company whether any changes in our specification or application details or otherwise have taken place since this literature was issued.

Company Registered in England No. 2678296 – Registered Office: Appley Lane North, Appley Bridge, Wigan, Lancashire, WN6 9AB

IKO Polymeric
Coney Green Road
Clay Cross, Chesterfield
S45 9HZ

T: 01257 488000
E: polymeric.technical.uk@iko.com
W: www.ikopolymeric.com